
Products (High Spec. Model)

Radiation Tolerant Repeater

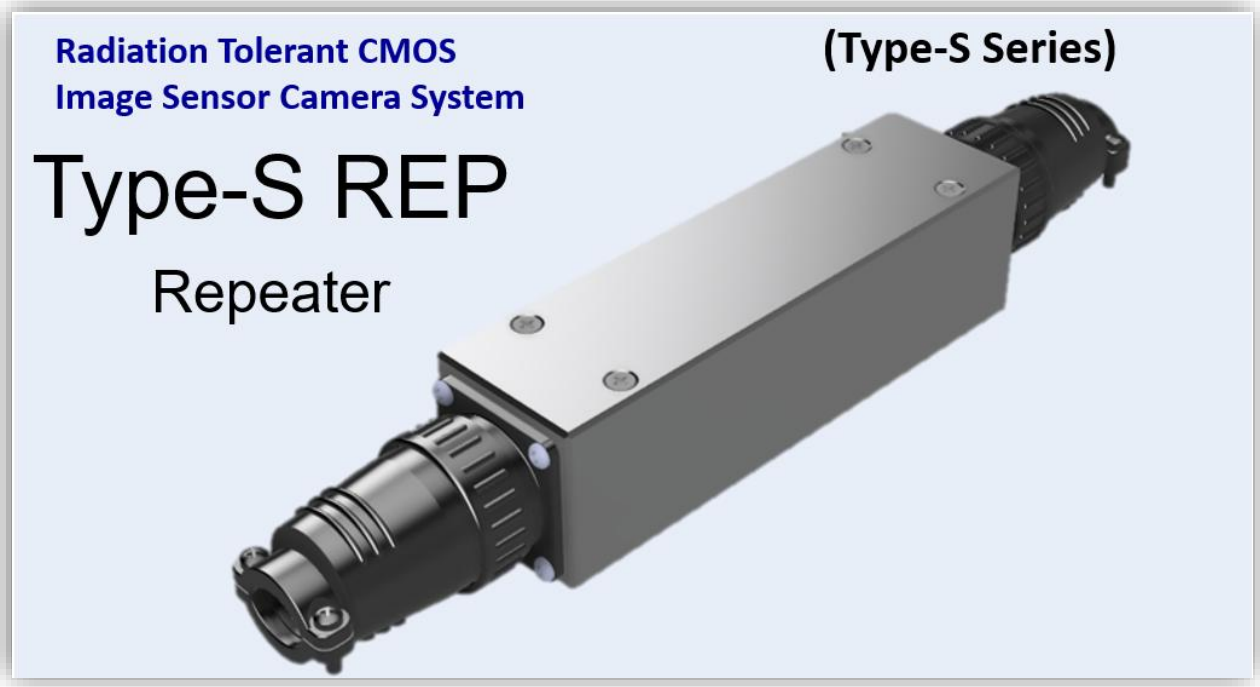

Basic Spec.

- Feature : Signal line and power line repeater for long cable
- Extension Capability
  : 60 m Max
  (Between CAMHD and REP)
  60 m Max
  (Between REP and CCU)
  180 m Max
  (Between CAMHD and CCU)

Specification	Feature	Signal line and power line repeater for long cable
	Power	From CCU
	Extension Capability	60 m Max (Between CAMHD and REP) 60 m Max (Between REP and CCU) 180 m Max (Between CAMHD and CCU)
	Operating Temperature	0~60℃
	Diameter	40 mm x 40 mm(approx.)
	Length	145 mm including Connector
	Weight	410 g(approx.)
	Housing	Aluminum
Radiation Tolerance	Radiation Tolerance	2 MGy, Gamma
	Radiation Dose Rate	< 3 kGy/h

Manufactured and Distributed by **Mach Corporation Co.Ltd**.

Head Office ：2-5-15 Kitasaiwai Nishi-ku, Yokohama-city, Kanagawa, Japan
Zip Code 220-0004

TEL/045-412-0400 FAX/045-412-0415

Note : Specifications are subject to change without notice.
This Product subject to the Export Trade Control Order.